




GateWay  
Fax  
Systems, Inc.

## Model 910 Automatic Fax/STU Switch

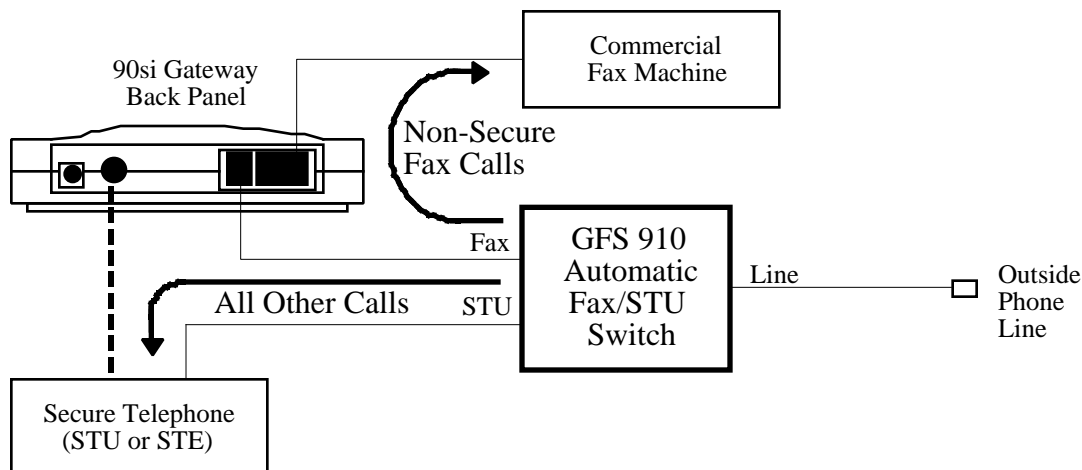

## Automatically receive non-secure faxes using only one phone line!!!

With the **Model 910** Automatic Fax/STU Switch you can receive unclassified, non-secure, faxes without operator intervention. The factory standard 1-Line, Dual-Mode configuration requires the operator to answer the incoming call and manually transfer the incoming non-secure fax call to the fax. Using the same single phone line, the 910 automates the process. Unclassified fax calls ring into the fax while secure voice, clear voice and secure fax calls ring into the Secure Telephone. The 910 Automatic Fax/STU Switch does all the work ... automatically!

Part Number: 910  
Price: \$295  
FOB: Destination, CONUS  
Delivery: 30 Days ARO or Less  
Warranty: 1 Year, Parts and Labor  
Credit Cards: VISA/MC.

### Model 910 Specifications

#### PHYSICAL DIMENSIONS

Device Size: 8 x 2.5 x 1.5 (LxWxH) In  
Device Weight: 0.625 Lb  
Shipping Dimensions: 12 x 8 x 2.5 (LxWxH) In  
Shipping Weight: 2 Lb

#### INPUT POWER

Wall Mount AC Power Adapter: 110-125VAC, 50-60 Hz  
At Power Jack: 12-14 VAC and DC  
POWER CONSUMPTION: 6.2 W

#### CO INTERFACE

Ringer Equivalence: 0.5 B  
Input Ring Detection: 40-150 VAC, 15-68 Hz

#### DEVICE INTERFACE

Battery: -48 VDC (Nominal) to all Devices  
Off-Hook Detection: 3-80 mA  
Ring Generator Frequency: 30 Hz (+/- .1 Hz)  
Waveform: True Sinusoidal  
Ringing No Load: Approx. 82.8 VAC RMS  
Ringing 8000 Ohm Impedence: Approx. 81.6 VAC RMS  
Ringing 4000 Ohm Impedence: Approx. 73.0 VAC RMS  
Ringing 2667 Ohm Impedence: Approx. 64.5 VAC RMS  
Ringing 2000 Ohm Impedence: Approx. 55.0 VAC RMS  
Ringing 1800 Ohm Impedence: Approx. 49.5 VAC RMS

GateWay Fax Systems, Inc.  
Secure Facsimile Products  
Virginia, USA

tel: 804-796-1900 toll free: 1-877-951-9800  
fax: 804-796-1116 email: info@gwfs.com  
web: [www.gwfs.com](http://www.gwfs.com)



GateWay  
Fax  
Systems, Inc.